







Job No: \_\_\_\_\_ Type: \_\_\_\_\_  
 Cat. No. \_\_\_\_\_  
 Notes: \_\_\_\_\_


LOW VOLTAGE TRANSFORMERS

TW Series 50w


ISOLATION TYPE TRANSFORMER FOR REMOTE INSTALLATION APPLICATIONS

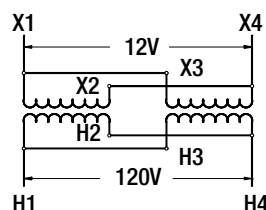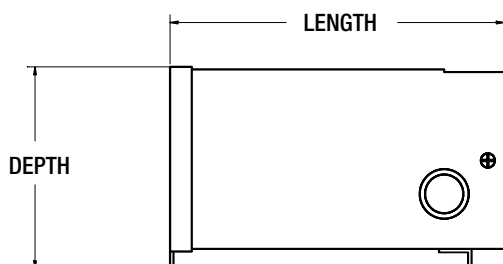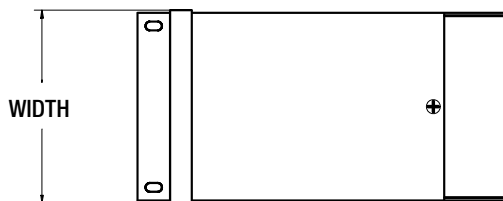


120V TO 12V

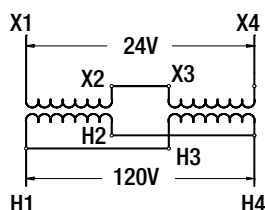

120V TO 24V

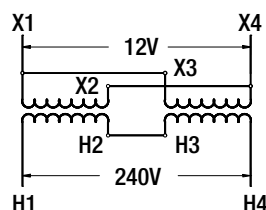

240V TO 12V

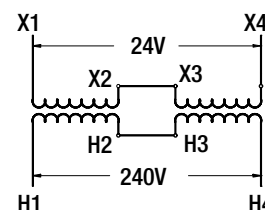

240V TO 24V

FEATURES

**DIMENSIONS**

Height: 5.82"  
 Width: 3.19"  
 Depth: 2.75"  
 Weight: 4 lbs.

**RATINGS** KVA: .050

**PHASE** 1

**FREQUENCY** 50 / 60 Hz

**SOUND LEVEL** 40 db. (Ave.)

**INSULATION CLASS** 130°C

**TEMPERATURE RISE** 80°C

**EFFICIENCIES** 83.3% @ 100% Load,  
 83.3% @ 75% Load

**ENCLOSURE** NEMA Type 3R, UL Type 2 -  
 Min. field installed clearances: Side 4",  
 Vertical 4".

**HIGH VOLTAGE, PRIMARY** 120 x 240 volts

**LOW VOLTAGE, SECONDARY** 12/24 volts

**COMPLIANCES** UL Listed, CSA Certified  
 for use with Ardee Lighting low voltage  
 lights.

ORDERING INFORMATION

**TW50**

*We reserve the right to change details of design, materials, and finish.*