



7S SERIES - SQUARE COMPACT
FLUORESCENT RECESSED
DOWNLIGHT TALL ROUGH-IN


ModuleX CF

Job No:


Type:

Cat. No.

Notes:

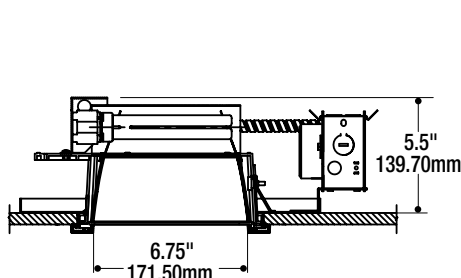

ILLUSTRATED ABOVE WITH FLAT FLANGE TRIM

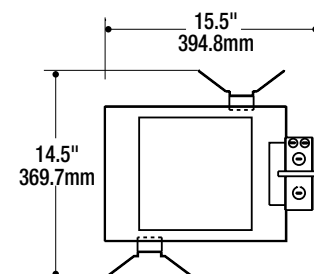CEILING CUTOUT DIMENSION:
8.11" (206mm) square

SPECIFICATIONS

GENERAL Suitable for through branch circuit conductors that must be rated for at least 90°C.

FRAME Made of sheet metal steel. 10.04" (245mm) wide x 13.07" (332mm) long x 0.63" (16mm) high; opening is 8.11" (206mm) square.

HOUSING Made of die-cast aluminum. Pre-drilled holes for Lampholder bracket mount. Three mounting brackets with thumb screws support housing onto frame through various ceiling thicknesses up to 0.75" (19mm). Additional four M4 tapped holes for wet locations.

JUNCTION BOX, LAMPHOLDER BRACKET, AND BUTTERFLY BRACKET ASSEMBLY All made from galvanized steel. Butterfly Bracket Assembly can be adjusted for ceiling variation and will accept various mounting bars for support.

BALLAST Standard: Advance SmartMate, 120 to 277V / 60Hz, electronic, -18°C (0°F) minimum start temperature, Class A sound rating, RFI comply with requirements of the FCC rules and regulations.
Emergency: 10TA 1-42-EM-A, ignites one lamp for up to 90 minutes. **Dimming:** Universal ES5013HT for two 26W quad lamp(s), 120 to 277V / 50-60Hz. Universal ES5010HT for one 32/42W triple or one 26W quad lamp, 120 to 277V / 50-60Hz. Note: consult factory for other ballast options.

LAMPHOLDER BJB lampholders for GX24 (triple tube) and G24 (quad tube) lamp bases.

COMPLIANCES UL listed, dry, damp, or wet locations.

ORDERING INFORMATION

catalog number	description	catalog number	description
A7ST.126	(1) 26W Quad Tube Lamp	A7ST.218	(2) 18W Quad Tube Lamp
A7ST.126-E	(1) 26W Quad Tube Lamp, Emergency Ballast	A7ST.218-E	(2) 18W Quad Tube Lamp, Emergency Ballast
A7ST.126-W	(1) 26W Quad Tube Lamp, Wet Location	A7ST.218-W	(2) 18W Quad Tube Lamp, Wet Location
A7ST.132	(1) 32W Triple Tube Lamp	A7ST.226	(2) 26W Triple Tube Lamp
A7ST.132-E	(1) 32W Triple Tube Lamp, Emergency Ballast	A7ST.226-D	(2) 26W Triple Tube Lamp, Dimming Ballast
A7ST.132-W	(1) 32W Triple Tube Lamp, Wet Location	A7ST.226-E	(2) 26W Triple Tube Lamp, Emergency Ballast
A7ST.142	(1) 42W Triple Tube Lamp	A7ST.226-W	(2) 26W Triple Tube Lamp, Wet Location
A7ST.142-D	(1) 42W Triple Tube Lamp, Dimming Ballast		
A7ST.142-E	(1) 42W Triple Tube Lamp, Emergency Ballast		
A7ST.142-W	(1) 42W Triple Tube Lamp, Wet Location		

We reserve the right to change details of design, materials, and finish.