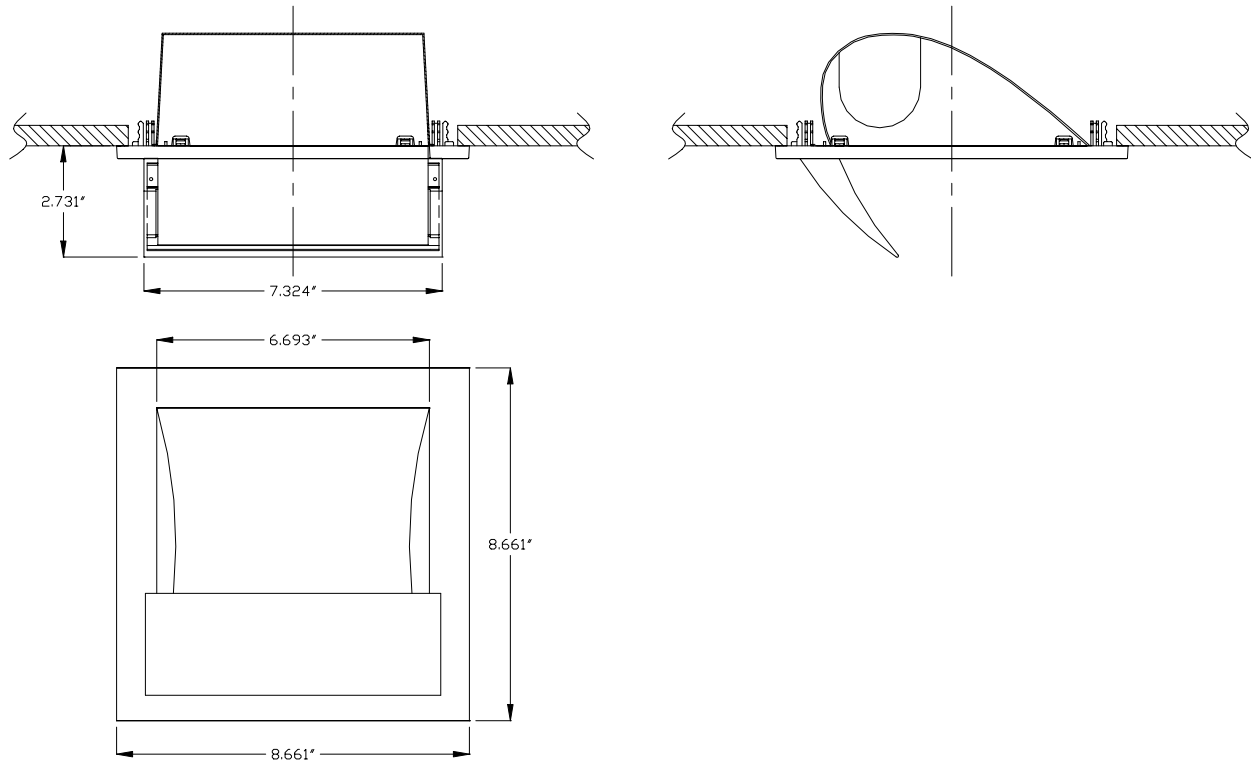


ModuleX CF

7S SERIES - SQUARE COMPACT FLUORESCENT RECESSED DOWNLIGHT TRIM FOR WALL WASH



SPECIFICATIONS:

1. **Frame:** Flat Style Trim Flange. Molded of UL94-HB plastic. Supports the Glass Lens, Reflector, Gasket mounting plate and Gasket. Held to Fixture Housing by (4) 0.090"(23mm) retaining fingers inserted into housing clips.
2. **Reflector:** Made of 0.039"(1mm) specular Aluminum. Curved flange below trim throws light in the direction of the wall in an even pattern without scallops.
3. **Available Finishes:** Matte White or Metallic Silver
4. **Compliances:** UL Listed.

Catalog Number:	Finish:
7S.04 WH	Matte White
7S.04 MS	Metallic Silver

ARDEE LIGHTING INC.

A Subsidiary of JJI Lighting Group, Inc.
 PO Box 1769, 639 Washburn Switch Rd.
 Shelby, NC 28151
 (704) 482-2811 | Fax (800) 275-1544

www.ardeelighting.com

E-mail: ardee@jjishelby.com

022178
 3/15/2005

ModuleX CF 7S SERIES PHOTOMETRY FOR WALL WASH

7SW.142 - 7S041WH

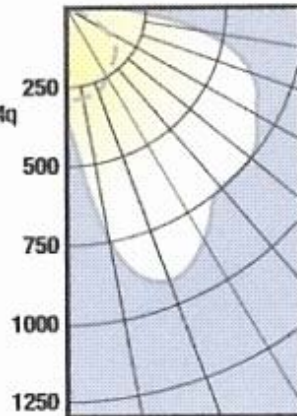
Photometric Data

Test No: H05816

Lamp: (2) FM42W/GX24q

Lumens: 3200

Efficiency: 50.1%

 --- 0
 ——— 90

Footcandles on wall

Distance from wall 3 ft.

Aiming angle 90

Dfc	Single unit Dfl					Multiple units Dbl						
	0	1	2	3	4	5	3		5			
1	56	46	26	12	6	3	83	79	83	62	37	62
2	46	39	26	15	8	4	77	77	77	55	41	55
3	29	26	19	12	7	4	56	57	56	38	33	38
4	18	17	14	9	6	4	40	41	40	27	26	27
5	12	12	10	7	5	4	30	30	30	20	20	20
6	9	8	7	6	4	3	23	23	23	16	16	16
7	6	6	5	4	4	3	17	18	17	12	12	12
8	4	4	4	3	3	2	13	13	13	9	10	9
9	3	3	3	3	2	2	10	10	10	7	8	7

Dfc = distance from ceiling

Dfl = distance from luminaire in feet

Dbl = distance between luminaires in feet

Footcandle values are initial

7SW.142 - 7S041WH

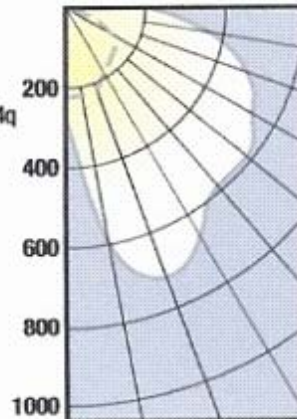
Photometric Data

Test No: H05813

Lamp: (2) FM32W/GX24q

Lumens: 2400

Efficiency: 52.8%

 --- 0
 ——— 90

Footcandles on wall

Distance from wall 3 ft.

Aiming angle 90

Dfc	Single unit Dfl					Multiple units Dbl						
	0	1	2	3	4	5	3		5			
1	45	36	21	10	4	2	65	62	65	49	29	49
2	36	31	21	12	6	3	61	61	61	43	33	43
3	23	21	15	10	6	4	44	45	44	30	26	30
4	14	13	11	8	5	3	31	32	31	21	20	21
5	10	9	8	6	4	3	23	24	23	16	16	16
6	7	7	6	5	3	3	18	18	18	12	13	12
7	5	5	4	4	3	2	13	14	13	10	10	10
8	3	3	3	3	2	2	10	10	10	7	8	7
9	3	2	2	2	2	1	8	8	8	6	6	6

Dfc = distance from ceiling

Dfl = distance from luminaire in feet

Dbl = distance between luminaires in feet

Footcandle values are initial

Catalog Number:	Finish:
7S.041WH	Matte White
7S.041MS	Metallic Silver

ARDEE LIGHTING INC.

 A Subsidiary of JJI Lighting Group, Inc.
 PO Box 1769, 639 Washburn Switch Rd.
 Shelby, NC 28151
 (704) 482-2811 | Fax (800) 275-1544

www.ardeelighting.com

E-mail: ardee@jjishelby.com

 022178
 3/15/2005